

Blanking Dimensions


voestalpine Tubulars proprietary connection
VAexplorer[®]

VExplorer®

Blanking Dimensions: Dimensions of voestalpine Tubulars proprietary connections to be considered for the design of accessories

Rev.1: New dimensions °

VExplorer®

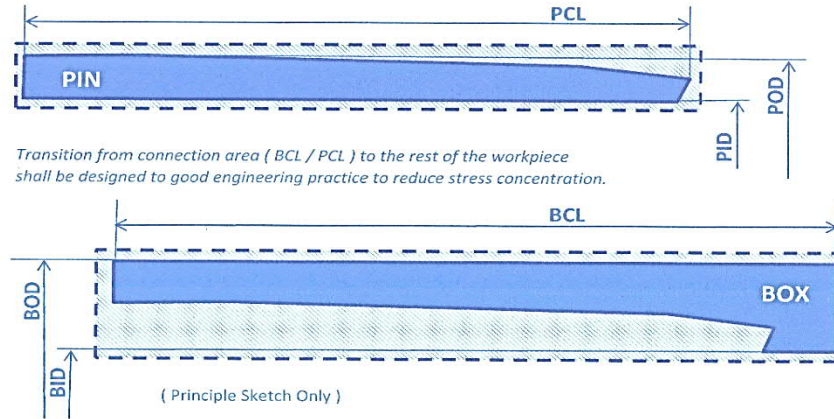

BOD* BOX OUTSIDE DIAMETER
BID* BOX INSIDE DIAMETER
BCL BOX CONNECTION LENGTH

POD* PIN OUTSIDE DIAMETER
PID* PIN INSIDE DIAMETER
PCL PIN CONNECTION LENGTH

* Minimum and maximum dimensions after final machining of the connection.
Reasonable machining allowances shall be agreed with the licensed threader of the connection by considering type of blank (already pre-machined or raw) and/or shape of the whole workpiece.

VExplorer®

PIPE DESIGNATION		CASING					
		PIN			BOX		
O.D	lb/ft	POD [mm]	PID [mm]	PCL [mm]	BOD [mm]	BID [mm]	BCL [mm]
		MIN.	MAX.	MIN.	MIN.	MAX.	MIN.
4 1/2	13,50 °	114,3	97,98	120,8	130,00	97,98	100,80
	15,10 °		95,59			95,59	
5 1/2"	20,00	139,70	119,77	124,80	160,02	119,77	104,80
	23,00		117,03			117,03	
	26,00 °		113,93			113,93	
	26,80 °		112,71			112,71	
6"	24,50	152,40	130,49	127,80	170,00	130,49	107,80
7"	26,00 °	177,80	157,83	134,80	200,00	157,83	114,80
	29,00 °		155,49			155,49	
	32,00 °		153,19			153,18	


° New Dimensions

Recut lengths

voestalpine Tubulars GmbH & Co KG
www.voestalpine.com/tubulars

voestalpine
ONE STEP AHEAD.

Recut lengths

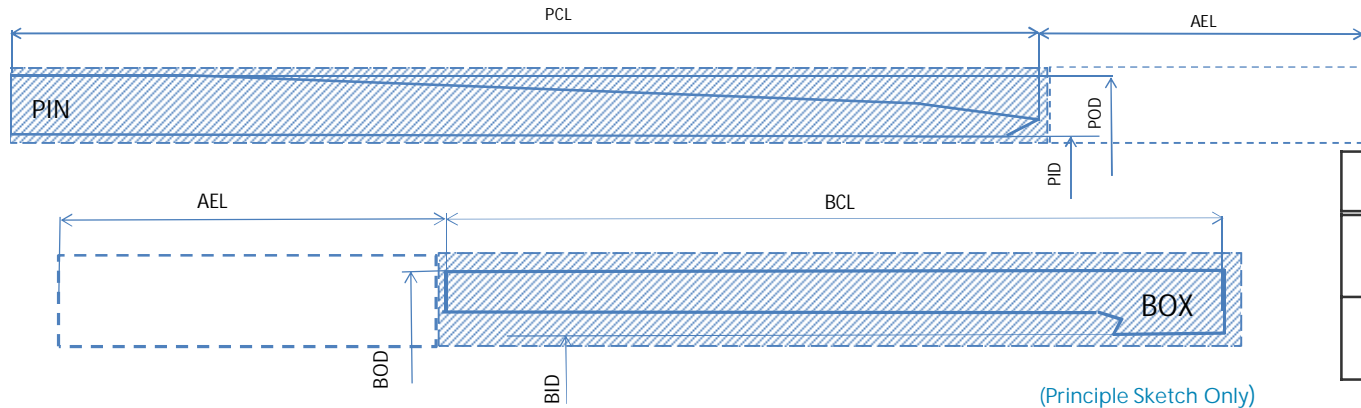

AEL (Min)	
≥ 4 1/2" PIN	58 mm
≥ 4 1/2" BOX	62 mm

BOD*..... BOX OUTSIDE DIAMETER
 BID*..... BOX INSIDE DIAMETER
 BCL BOX CONNECTION LENGTH
 AEL Minimum Additional excess length for one recut

POD*..... PIN OUTSIDE DIAMETER
 PID* PIN INSIDE DIAMETER
 PCL PIN CONNECTION LENGTH

* Minimum and maximum dimensions after final machining of the connection.

Reasonable machining allowances shall be agreed with the licensed threader of the connection by considering type of blank (already pre-machined or raw) and/or shape of the whole workpiece.